

The Global Space Geodesy Network: Activities Underway

Michael R. Pearlman¹, Alexander Ipatov², James Long³, Chopo Ma³,
Stephen Merkowitz³, Ruth Neilan⁴, Carey Noll³, Erricos Pavlis⁵,
Victor Shargorodsky⁶, David Stowers⁴, Scott Wetzel⁷

¹ Harvard-Smithsonian Center for Astrophysics, Cambridge MA, United States
(mpearlman@cfa.harvard.edu, 001 617 4960121)

² Institute of Applied Astronomy, Russian Academy of Sciences, St. Petersburg, Russia,

³ NASA Goddard Space Flight Center, Greenbelt MD, United States,

⁴ Jet Propulsion Laboratory/Caltech, Pasadena CA, United States,

⁵ University of Maryland, Baltimore MD, United States

⁶ OJCI"RPC"PSI", Moscow, Russia

⁷ Honeywell Technical Solutions, Inc, Lanham MD, United States





EGU General Assembly 2014

April 29, 2014



Global Geodetic Observing System (GGOS)

- Established by the IAG to integrate the three fundamental areas of geodesy (Earth's shape, gravity field, and rotation), to monitor geodetic parameters and their temporal variations in a global reference frame with a target relative accuracy of $10E-9$ or better (See GGOS 2020)
- **Provide products & services with the geodetic accuracy necessary to address important geophysical questions and societal needs, and to provide the robustness and continuity of service which will be required of this system in order to meet future needs and make intelligent decisions**
- **Constituted mainly from the Services (ILRS, IVS, IGS, IDS, and IERS)**
- **Main focus at the moment is the International Terrestrial Reference Frame**

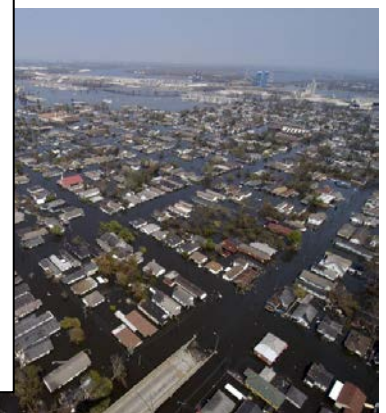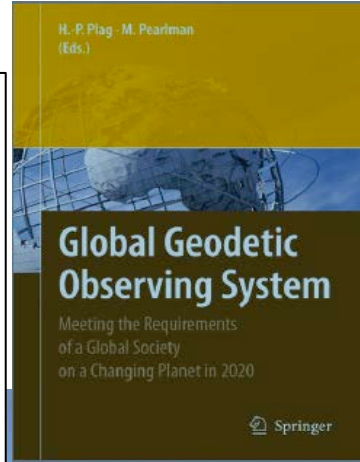


Practical applications of Space Geodesy

US National Research Council Study



- **Geodesy** is the science of the Earth's shape, gravity and rotation, including their evolution in time.
- **Techniques** used to observe the geodetic properties of the Earth **provide the basis for the International Terrestrial Reference Frame (ITRF)**
- The ITRF is the foundation for virtually all **airborne, space-based, and ground-based Earth observations**, and is fundamentally important for **interplanetary spacecraft tracking and navigation**.

April 29, 2014

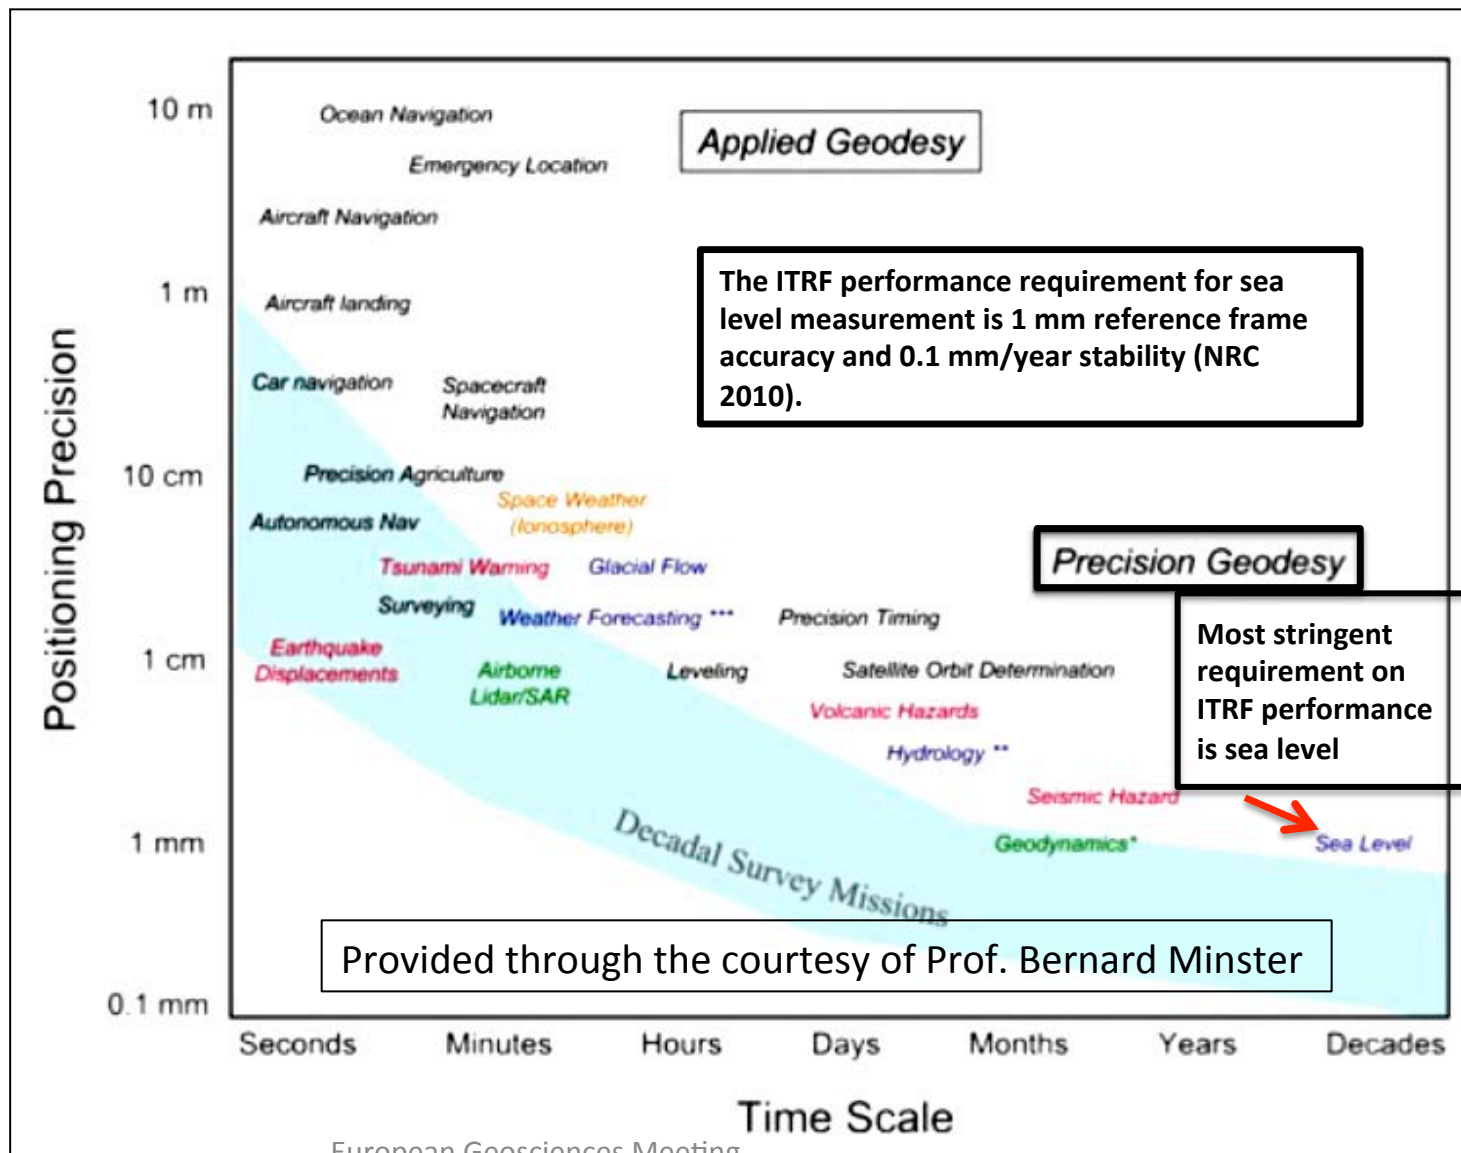



GGOS Reference Frame Requirement

- Basis upon which we measure change over space, time, and evolving technology
- Most stringent requirement from sea level rise:
 - “accuracy of 1 mm, and stability at 0.1 mm/yr”
 - **This is a factor 10-20 beyond current capability**
- Accessibility: 24 hours/day; worldwide
 - Users anywhere on the Earth can position their measurements in the reference frame**
- Space Segment:
 - LAGEOS, LARES, GNSS, DORIS to define the reference frame
- Ground Segment (Core Sites):
 - Global distributed network of “modern technology”, co-located SLR, VLBI, GNSS, DORIS stations locally tied together with accurate site ties
 - Dense network of GNSS ground stations to distribute the reference frame globally to the users






Simulation Studies to Scope the Network

(impact on the Reference Frame)

(Erricos Pavlis)

Simulation studies show:

- ~32 globally distributed, well positioned, new technology, co-location sites will be required to define and maintain the reference frame;
- ~16 of these co-location stations must track GNSS satellites with SLR to calibrate the GNSS orbits which are used to distribute the reference frame.

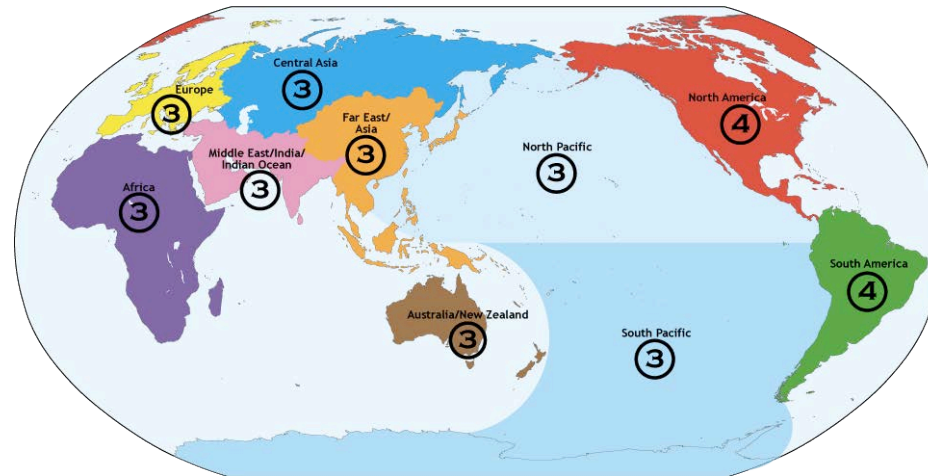

- Major Challenge
- Will require time, significant resources, and strong international participation



Reality

Recognizing that:

- Many sites will not be at ideal locations nor have ideal conditions;
- Core site deployment will occur over many years;
- We will have a mix of new and legacy technologies for many years;


As a result:

- Co-location sites (non-core sites) will continue to play a vital role in our data products;
- Quality of our output will be the product of network Core Sites, Co-location sites, mix of technologies, adherence to proper operational and engineering procedures, and making best use of the data once it leaves the field;




Responses to the GGOS CfP

Responses to the GGOS CfP

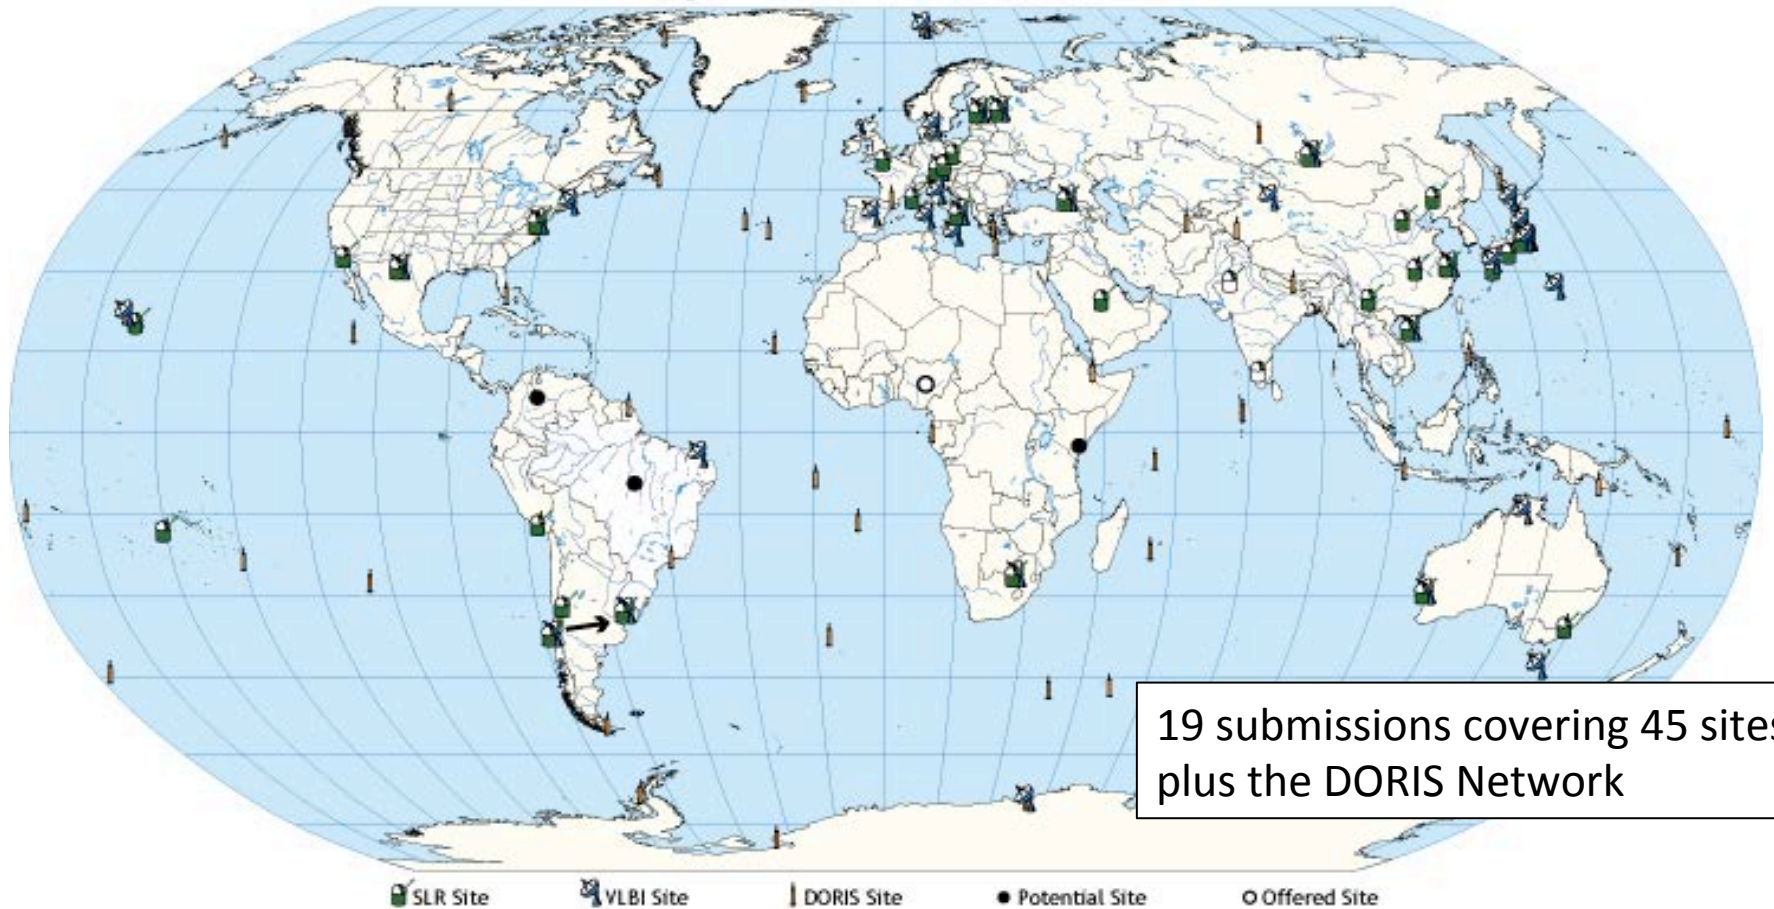




Activity underway on VGOS

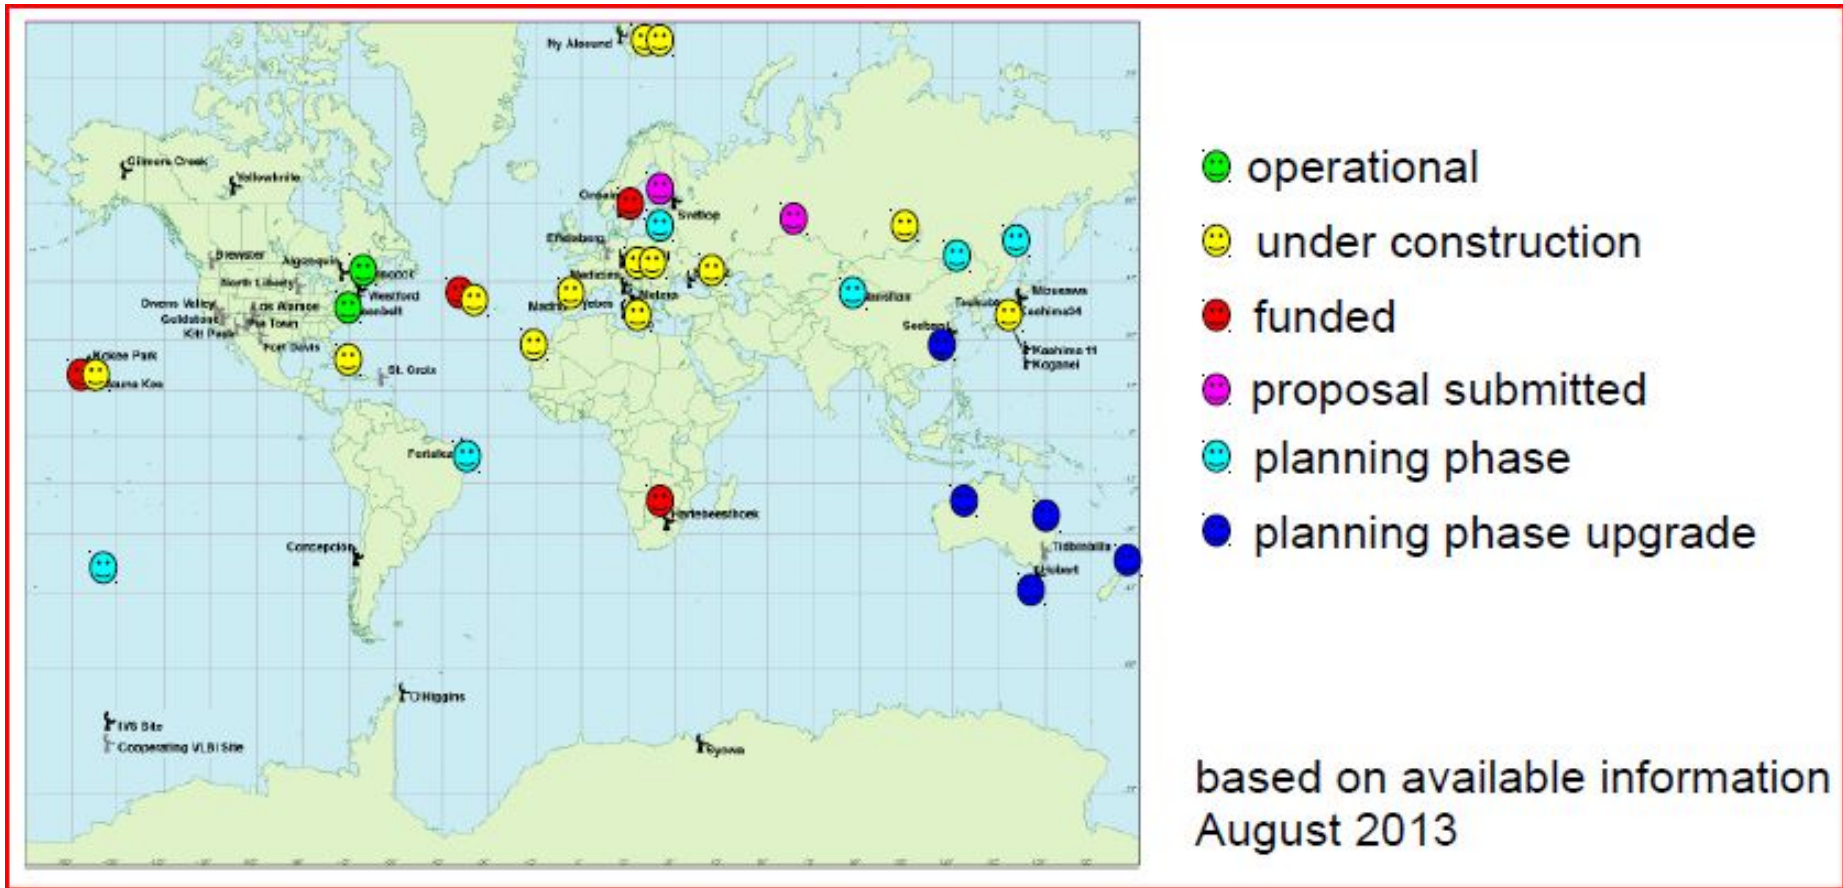



ILRS: Observation Network

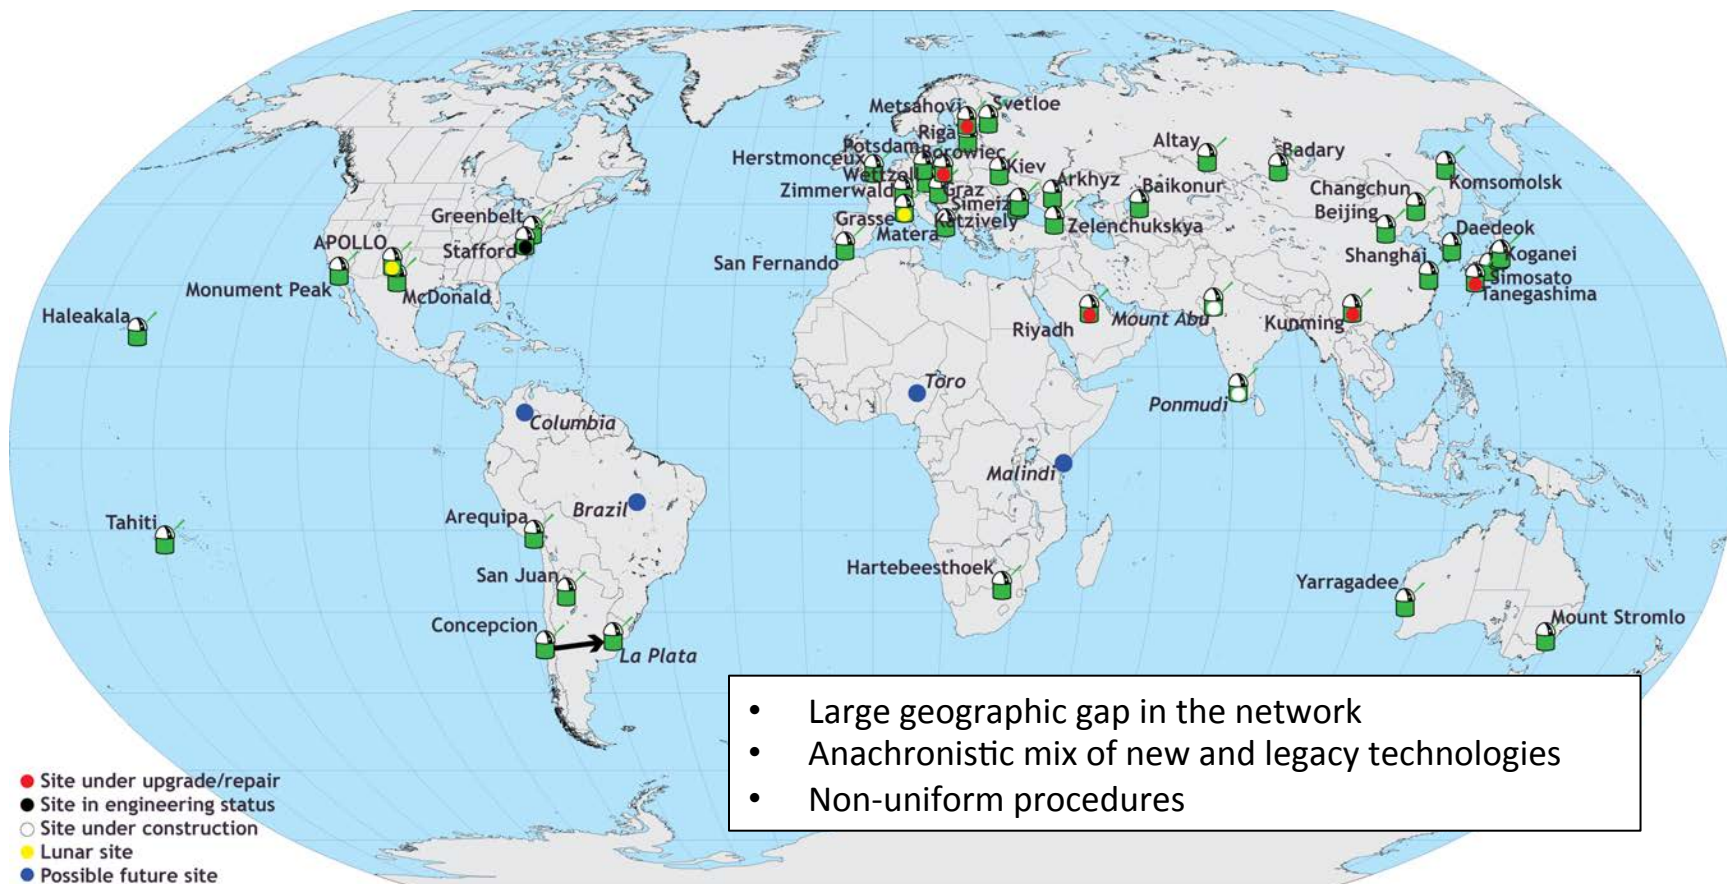




Two Recent Initiatives

- Expansion of the Russian Network to Support:
 - GLONASS accuracy and time transfer
 - GGOS
- NASA Space Geodesy Project to support the NASA role in International Space Geodesy and GGOS


Deployment of Russian SLR Network outside Russia

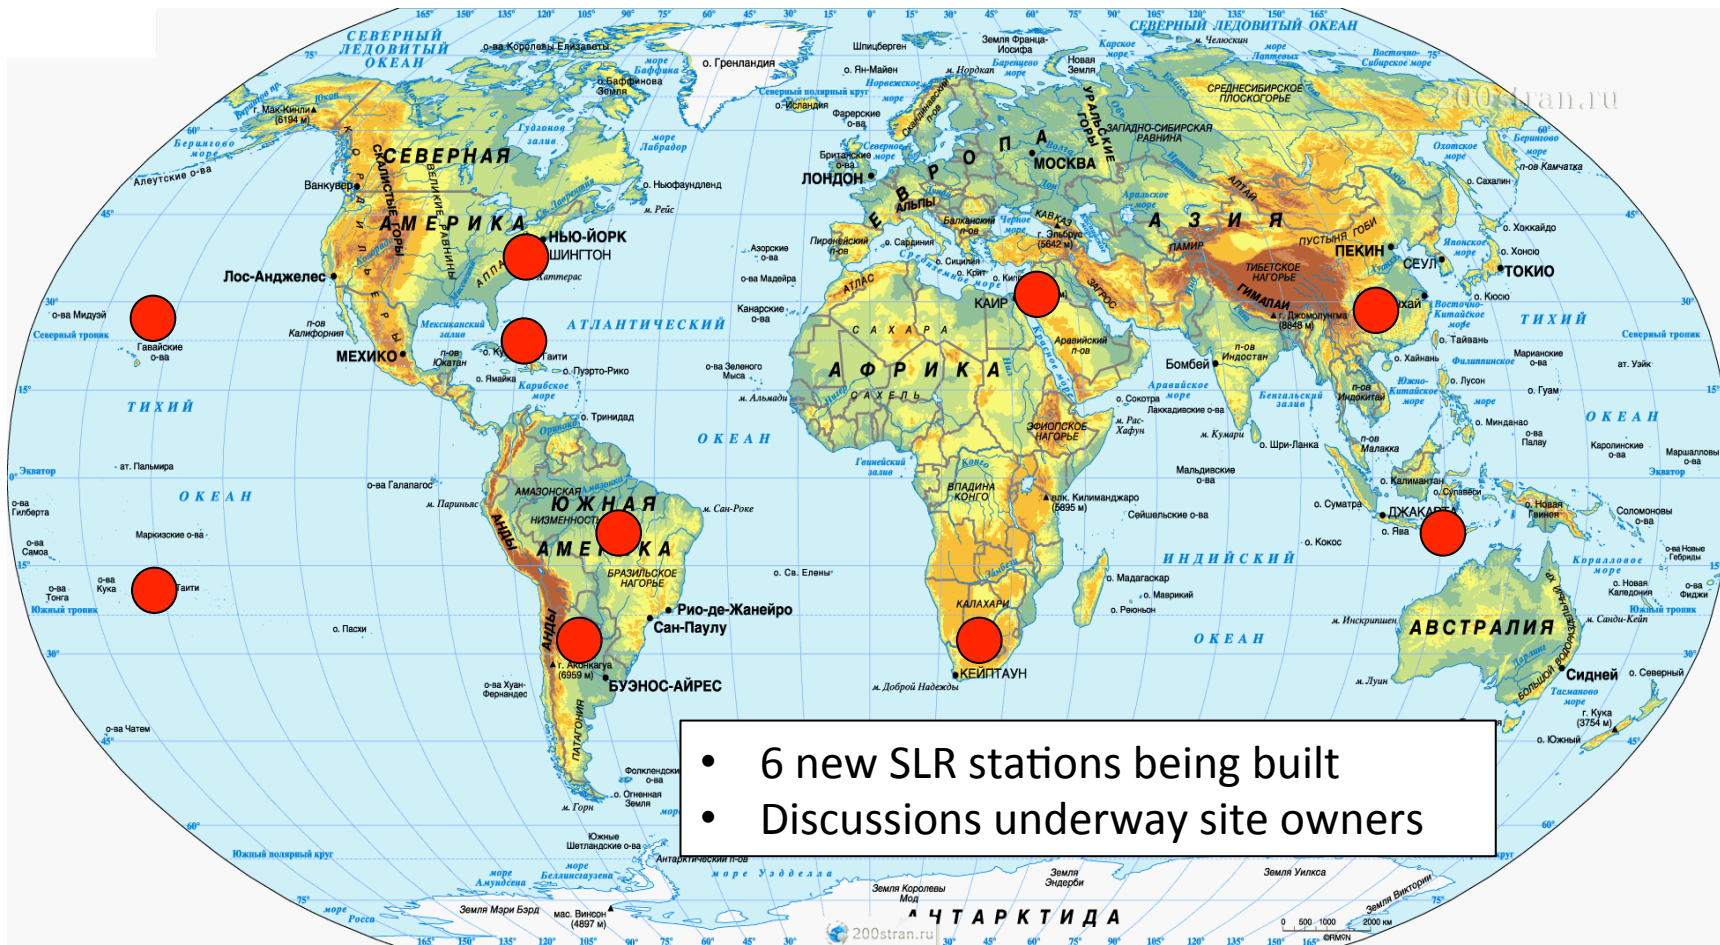

It is supposed to install 6 (4 new generation) SLR stations in the following possible places: Brasilia (Brazil), San Juan (Argentina), Haretheesthoek (South Africa), Haifa (Israel), Hangzhou (China), Timor (Indonesia), Tahiti (French Polynesia), Maui (USA), Greenbelt (USA), Havana (Cuba)



Proposal for placement of GLONASS receivers at ILRS stations and GLONASS SLR at IVS and IDS stations

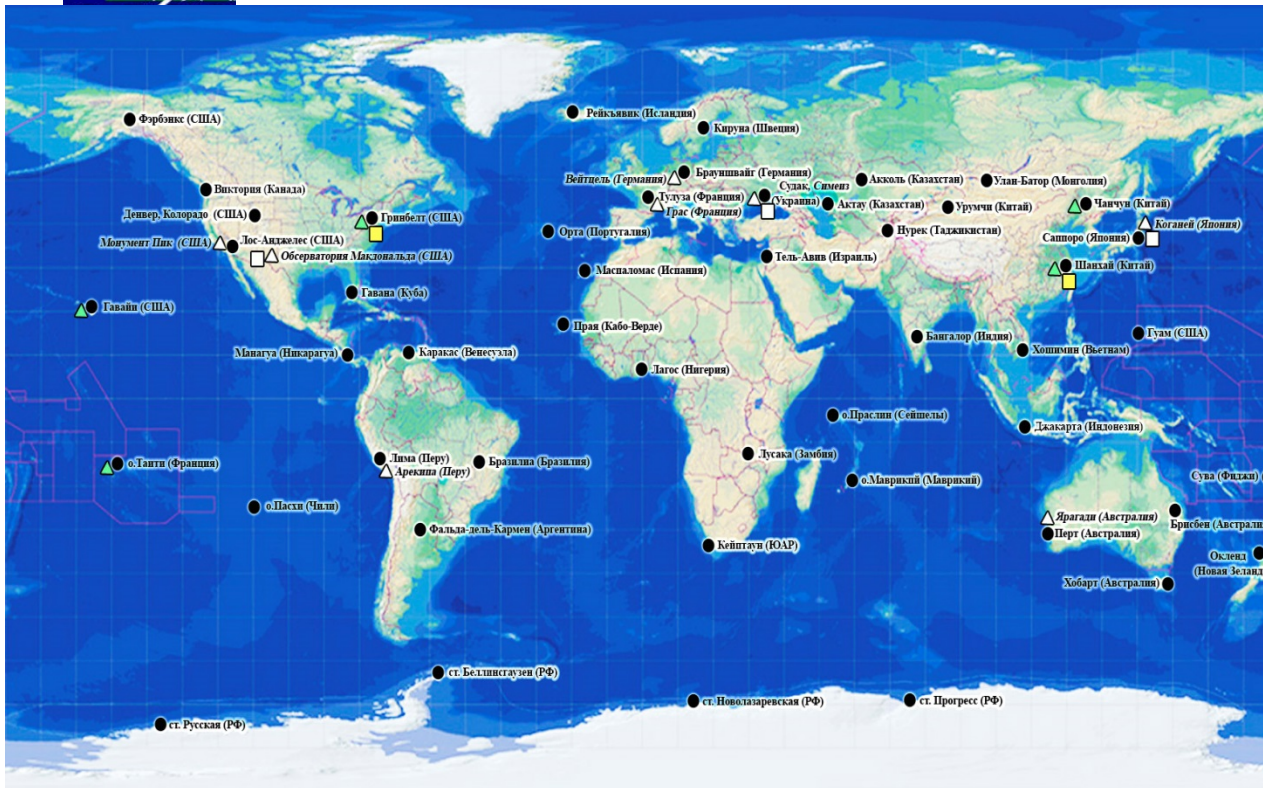

Features:

1. Priority placement of GLONASS receivers – collocation nodes of ILRS, VLBI, DORIS
2. Joint placement of GLONASS receivers and GLONASS SLR at the stations of IVS and IDS networks.

Cooperation proposals



Placement of 40-50 GNSSMS and 6 SLR in ILRS, IVS and IDS networks



NASA's Space Geodesy Project

- Demonstration of prototype next-generation core site:
 - NGSLR demonstrated required performance and is tracking current ILRS satellites including daylight ranging to GNSS.
 - Prototype VLBI2010 system demonstrated required performance and successfully performed several end-to-end geodetic sessions.
- Implementation (with USNO) of new VGOS station in Hawaii underway.
- Completing Western CONUS site selection and preparing for implementation of new core site.
- Upgrade underway to the NASA GNSS network to support new constellations (Galileo, GLONASS, Beidou) in addition to GPS.
- Ongoing discussions and planning with our international partners for the deployment of the new NASA network



NGSLR & MOBLAS-7 simultaneously ranging at the Goddard Geophysical and Astronomical Observatory (GGAO)



Next Generation Satellite Laser Ranging (NGSLR)



Very Long Baseline Interferometry (VLBI)




Global Navigation Satellite System (GNSS)



Doppler Orbitography and Radiopositioning Integrated by Satellite (DORIS)



Current and Candidate Core Sites

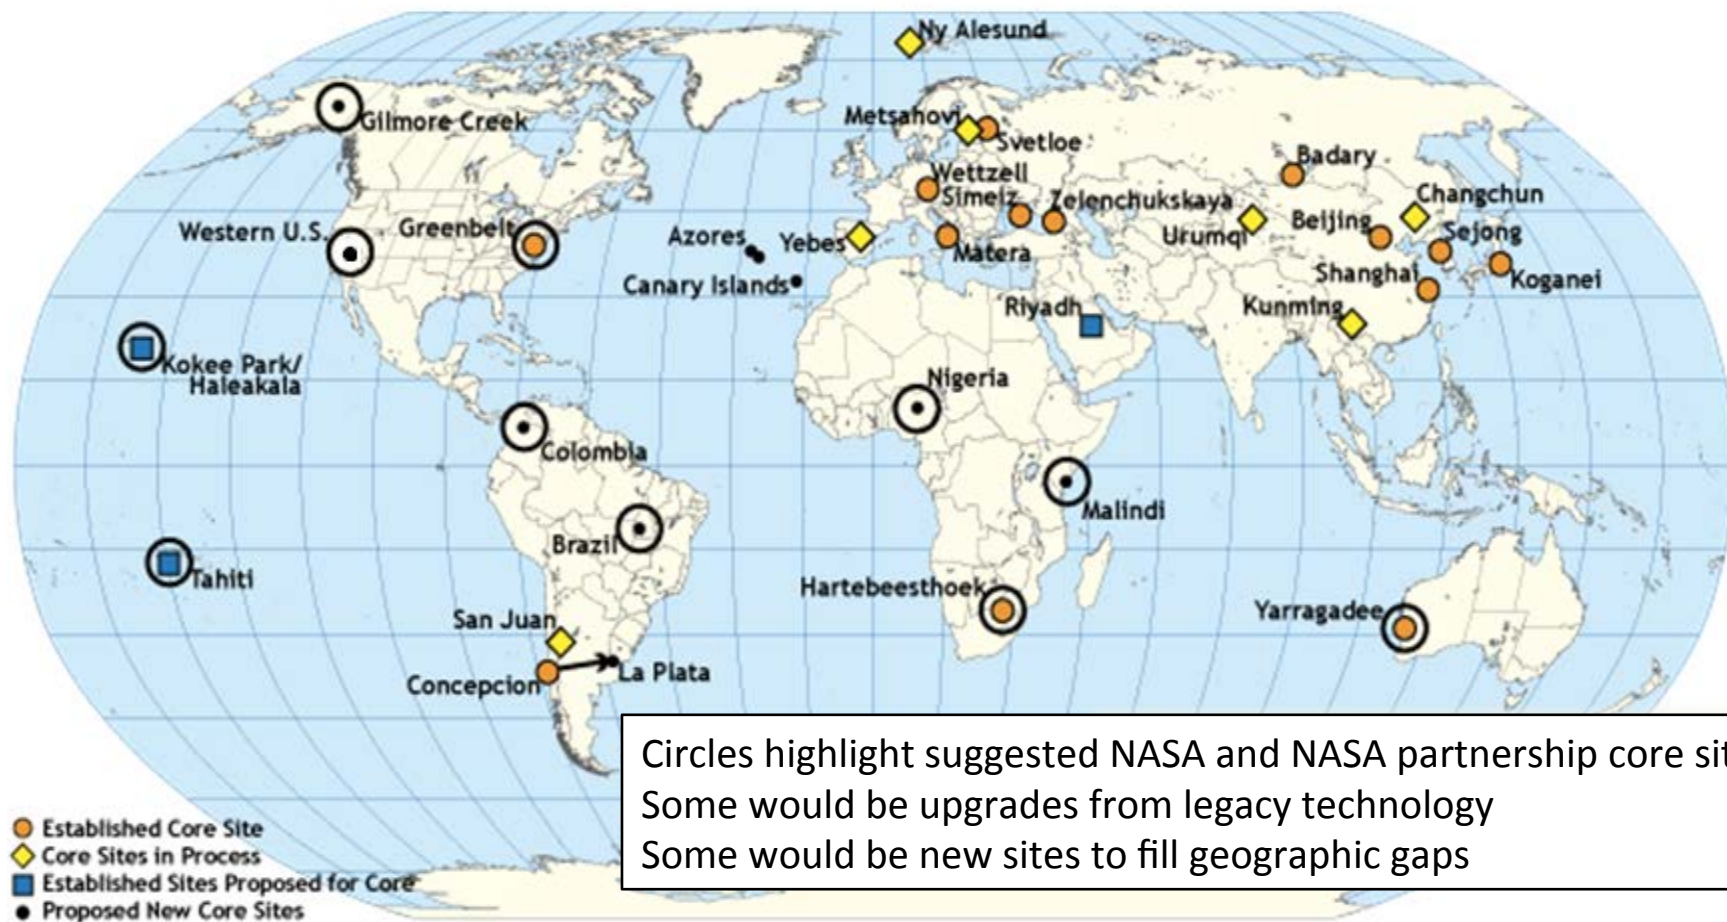

Given programmatic and technical constraints, the NASA SGP core sites (those either wholly owned or supported by NASA) required to cover gaps in the global site coverage are shown here (labeled “Proposed Core Sites”)



Sejong Site (South Korea)

- **VLBI, GNSS and Gravimeter** : NGII (National Geographic Information Institute)
 - In testing
- **SLR** : KASI (Korea Astronomy & Space Science Institute)
 - Operational at KASI HQ in Daejeon,
 - To be relocated to Sejong site in late 2014



- 40cm Rx and 10cm Tx telescope
- 2kHz repetition rate
- 2.5mJ/pulse and 50ps pulse width
- Aircraft detection using a radar



- 22m Cassegrain antenna
- Rx frequency : 2, 8, 22 and 43GHz
- Aperture efficiency : ~60%
- GNSS receiver and Gravimeter



Ny Alesund Core Site

(From Ina Elsrud, PM)


- Planned to be a core station including VLBI, SLR, GNSS, DORIS, absolute gravity- and super conducting gravity meter
- Extreme interest because of the very high latitude (~80 Deg)
- Site infrastructure work is now underway
- 2018 - two VGOS telescopes, GNSS, DORIS and gravimeters
- 2020 – SLR
- 2021 – Closeout of the legacy VLBI after 3 year parallel run





Map of Sites in Japan

Response to GGOS CfP

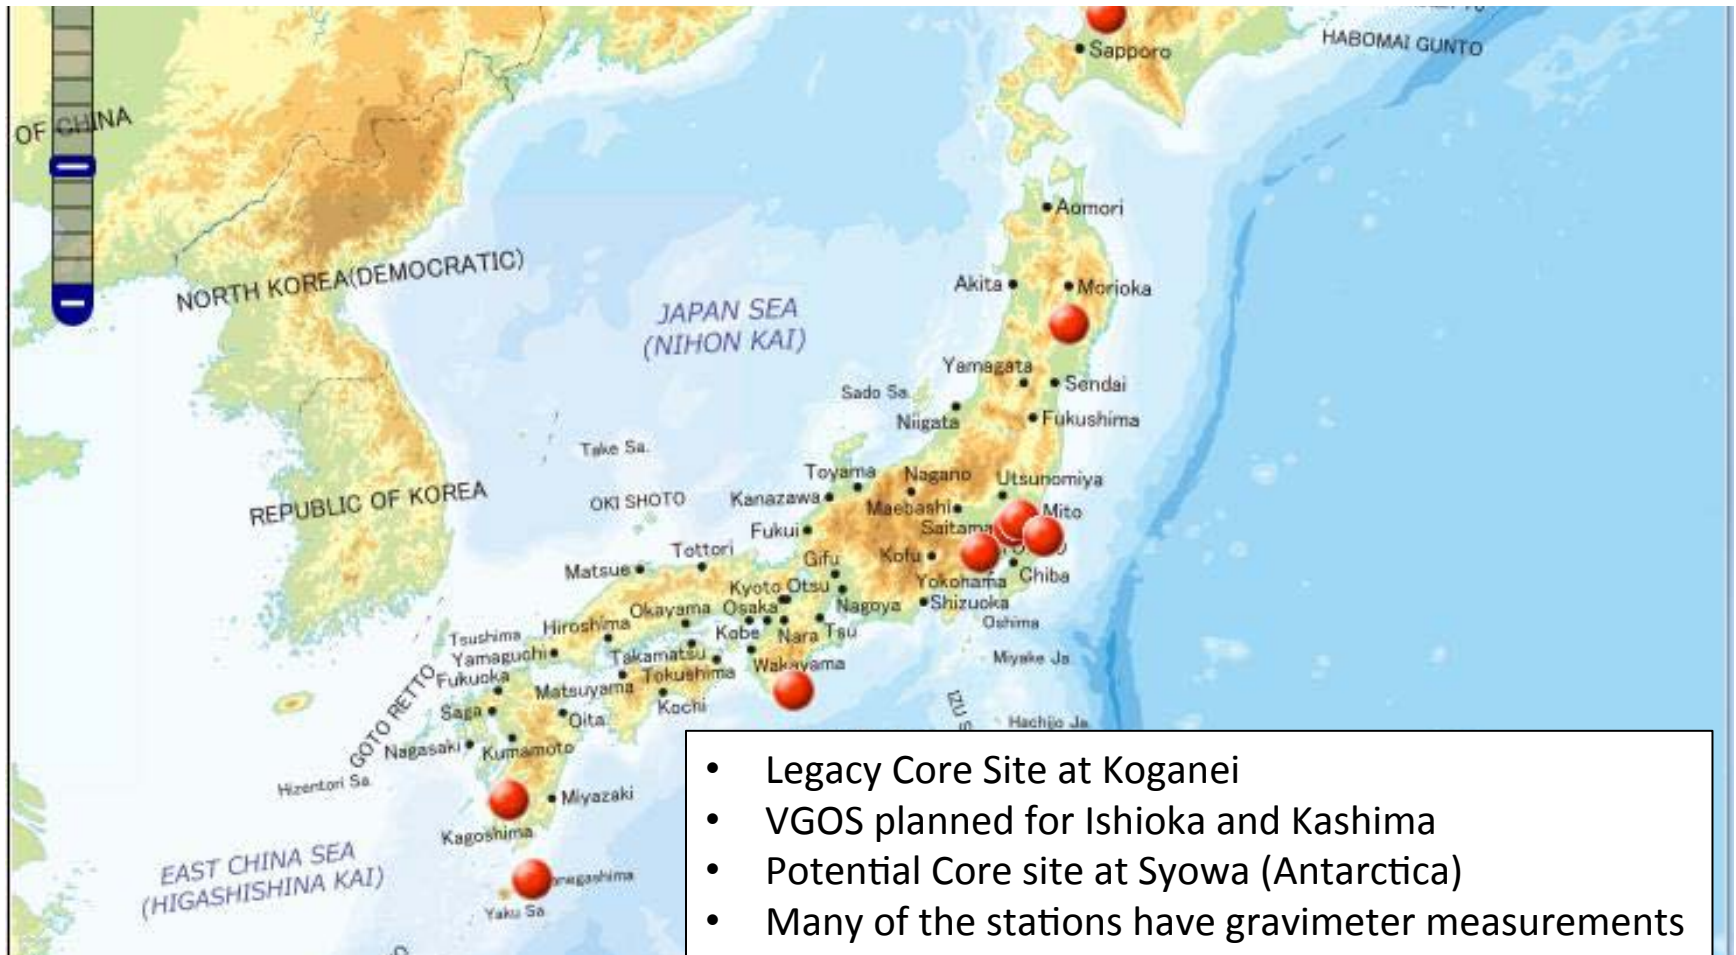

- Legacy Core Site at Koganei
- VGOS planned for Ishioka and Kashima
- Potential Core site at Syowa (Antarctica)
- Many of the stations have gravimeter measurements
- Joined the GGOS Network through the CfP



Planned SLR Installations in India (Construction underway)


SLR in India

- 1 meter Telescope;
- Photometry, debris tracking, SLR;
- Lasercom (future);

Site #1, Mount Abu,
24° 36' Lat, 72° 42' Long
near Jodhpur, Rajasthan

Bangalore
Remote Control Center

Site #2, Ponmudi,
8° 45' Lat, 77° 6' Long
near Trivandrum, Kerala

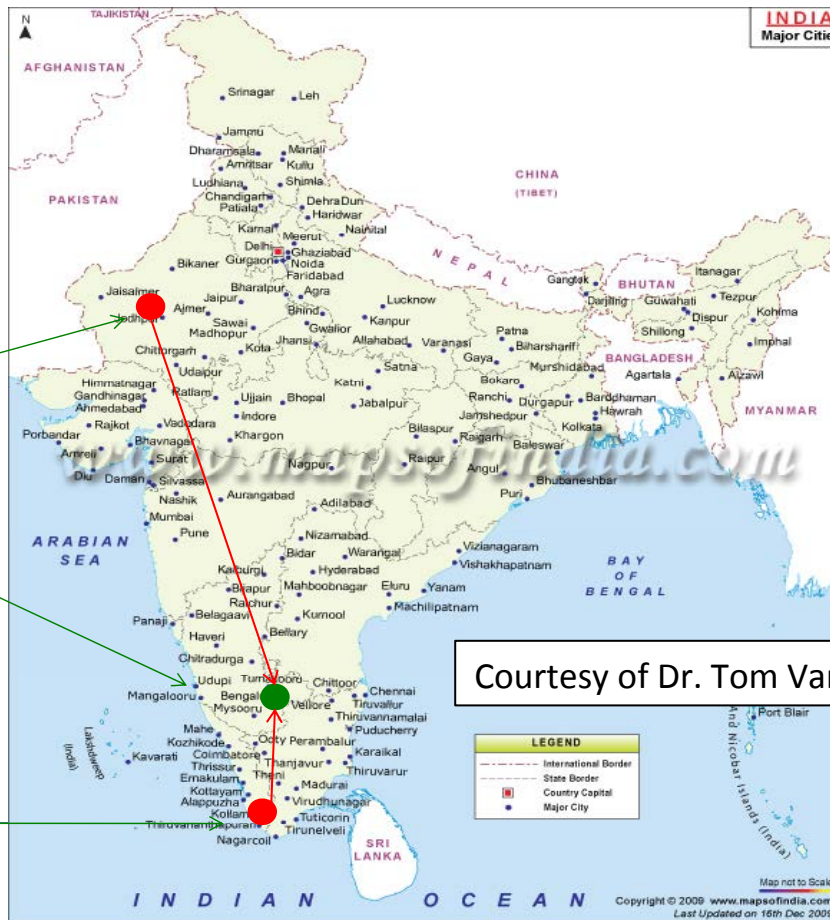



Sample Page from the Site Model (Network Projection)

Region/Class	Sites	Current Config.				5 Year Projected Configuration				10 Year Projected Configuration				Partner/ Agency	Other Equipment	Ground Stability	Ease of Business	Production	En. Rating	Cloud Cover	Site The Clearance (mm)	Days/Year	Data Rate	RFI Conditions	Site The Clearance (mm)	Sponsor Commitment	Equipment Provider	Issues/Comments		
		G	V	S	D	Gr	G	V	S	D	Gr	G	V																S	D
North America																														
VLBI	Brewster	L	L			L	L			L	L			NRAO	3					3		6	1	1	3				VLBA	
VLBI	Hancock	L				L				L				NRAO						2		6	1	1				VLBA		
VLBI	Kitt Peak	L				L				L				NRAO						3		6	1	1				VLBA		
VLBI	Los Alamos	L				L				L				NRAO						3		6	1	1				VLBA		
VLBI	Mauna Kea	L	L			L	L			L	L			NRAO	2					3		6	2	1				VLBA		
VLBI	North Liberty	L	L			L	L			L	L			NRAO	3					2		6	1	1	7			VLBA		
VLBI	Pie Town	L	L			L	L			L	L			NRAO	1					2		6	2	1	4			VLBA		
VLBI	St. Croix	L	L			L	L			L	L			NRAO						2	3	6	1	1	3			VLBA		
Europe																														
Core	Wetzell, Germany	N	L	L	AS	N	N	N	AS	N	N	N	N	BKG	3	3	3	2	2	9	133	3	1	4,10	3			Historic Site		
VLBI	Grasse, France	L	L			N	L	AS	N	L	N	L	GRGS	3	3	3	2	2	2,7						3		Historic Site			
VLBI	Effelsberg, Germany	L				L				L			MPIR						1		2	3	1							
Core	Matera, Italy	N	L	L		N	L	L	A	N	N	N	A	ASI	3	3	3	2	2	6	52	0	0	10	3			Historic Site		
Core Plan	Yebeas, Spain	L	L	AS	N	N	AS	N	N	N	AS	IGN	2						2		35	3	1	7	3					
VLBI	Madrid, Spain	L	L			N	L			N	L		NASA						2		8			9						
VLBI Plan	Canary Islands					N	N			N	N		IGN						2				1		5		very cloudy Nov - June, other time can be very clear..depending on exact location			
VLBI Plan	Azores					N	N			N	N		DRCTC	3					3				1		5		Mostly cloudy at the Terceira Island location. Need better location identification			
SLR (Core Plan)	Herstmonceux, GB	N	L	A		N	N	A		N	N	N	A	NERC	3	3	3	3	2	4					3			Historic Site		
SLR	Graz, Austria	N	N			N	N			N	N		OEAW	3	3	3	3	2	6							3		Historic Site		
SLR	Zimmerwald, Switzerl	N	N			N	N			N	N		AUB	3	3	3	3	3	2,6						3		Historic Site			
SLR	Potsdam, Germany	L	L			N	L			N	L		GFZ	3	3	2	2	2	7,22						3		Historic Site			
SLR	San Fernando, Spain	L	L			N	L			N	L		ROA	3	3	2	2	3	21						3		Historic Site			
SLR	Borowiec, Poland	L	L			N	L			N	L		SRC/PAS	3	3				2	3					2		Historic Site			
VLBI (Core Plan)	Metsahovi, Finland	L	L	AS	N	N	AS	N	N	N	AS	FGI	3	3				2	12,62		10	3	1		3					
VLBI (Core Plan)	Ny Alesund, Norway	N	L			N	N			N	N		NMA	3	3				2		133	1	1		3					
VLBI	Medicina, Italy	L	L	S	N	L	S	N	N	N	IRA	2	3					2		24	3	0	4	3						
VLBI	Noto, Italy	L	L			N	L			N	N		IRA	3					2		12	3		7	2					
VLBI	Onsala, Sweden	L	L	AS	N	N	SA	N	N	AS	OSO	3	3					2		40	3	1	12	3		Historic Site				
SLR	Simeiz, Ukraine	L	L	L	N	L	L	N	L	L	CRAO	3	3	2	1	2			2		12	1	1	8	3					
VLBI																														
Middle East																														
SLR (Core Plan)	Riyadh, Saudi Arabia	L	L			N	N			N	N		KACST	3	1	1	1	3							2					



Joint GGOS/ILRS Study Group

LARGE: LAser Ranging to GNSS s/c Experiment

Expanded SLR Tracking of GNSS Satellites

Background:

- Large expansion in GNSS satellites with retroreflectors over the next 8 – 10 years;
- Strong need for SLR coverage for ITRF and calibration/co-location
- At the 18th International Workshop on Laser Ranging it was agreed to expand the GNSS data coverage of the ILRS network;
- GGOS/ILRS Study group has been formed, first meeting held on 4/28;

Objectives of this Study Group (SG) are:

- Define an operational GNSS tracking strategy for the ILRS that addresses all of requirements;
- Tests its realization with a tracking campaign Pilot Project;
- Clarify outstanding ILRS and IGS issues with the GNSS satellites and ground stations.

Action to date:

- Tracking tests underway to evaluate network capability
- Simulations being organized to examine value of different options/tradeoffs